



VALVE REGULATED LEAD ACID BATTERY - GEL LONG LIFE SERIES


MODEL: OT40-12L

NO.: 302010001-00092



Plane Chart:

Unit:(mm) Terminal type:(T1)

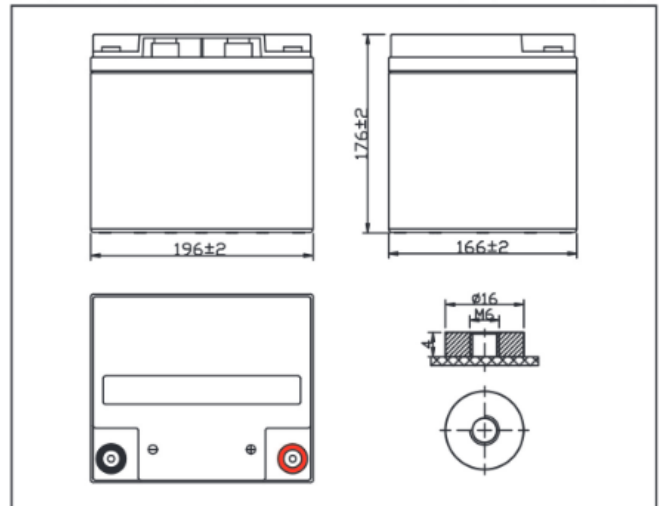


Parameter Chart:


Volts		12V	
Capacity(25°C)	10 hours rate (4A)	40Ah	
Discharge Current Testing (25°C)	20 I ₂₀ rate (40A,27min)	33min	
	60 I ₂₀ rate (120A,7min)	8min	
Internal Resistance	Full Charged Battery 25°C	7mΩ	
Capacity Affected By Temperature	40°C	104%	
	25°C	100%	
	0°C	83%	
	-15°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%	
	Capacity After 6 Months Storage	82%	
	Capacity After 12 Months Storage	65%	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 12A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	
Weight (Approx)		14.1Kg	

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

Residual Capacity

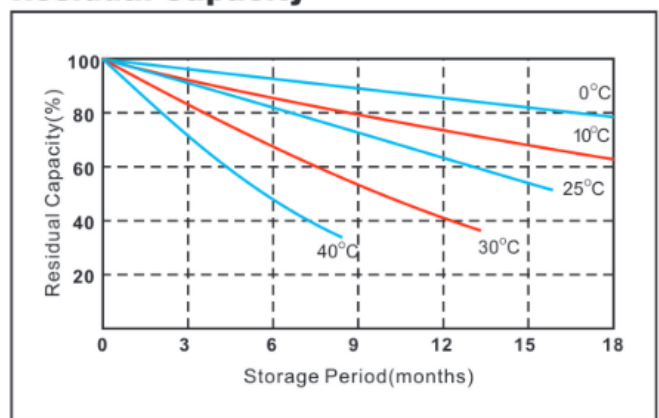

Discharge Current 25°C

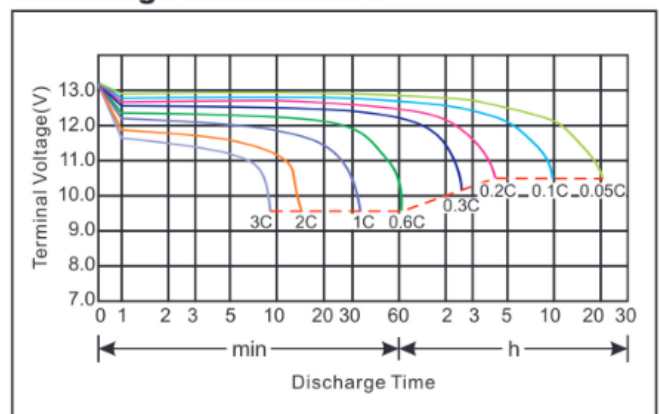




VALVE REGULATED LEAD ACID BATTERY - GEL LONG LIFE SERIES


MODEL: OT40-12L

NO.: 302010001-00092

Constant voltage charging characteristics

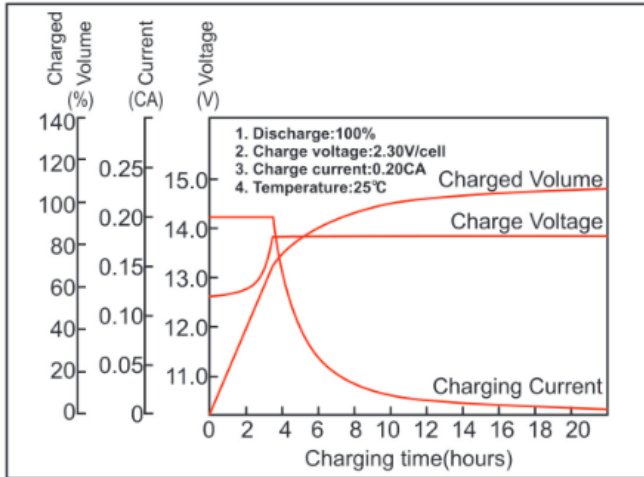

Float Life

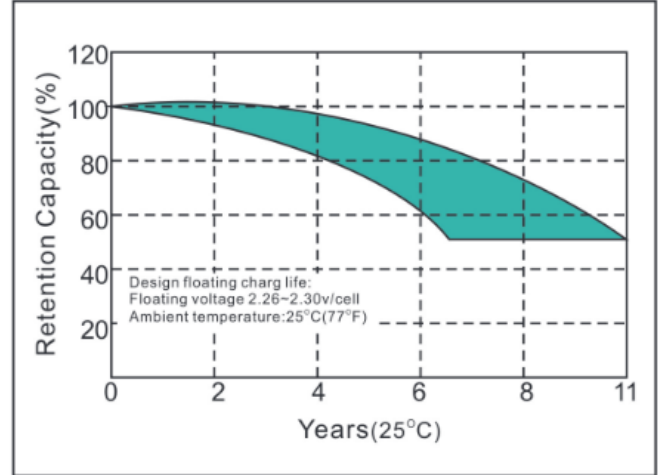

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	123.0	81.8	64.9	40.9	24.7	14.3	10.5	7.4	4.9	4.1	2.2
10.2V	116.9	77.7	62.3	39.2	23.8	14.2	10.3	7.3	4.9	4.1	2.1
10.5V	113.3	75.3	60.8	38.2	23.2	14.0	10.2	7.2	4.9	4.0	2.1
10.8V	109.7	73.1	59.2	37.3	22.6	13.9	10.1	7.1	4.8	4.0	2.1

Constant Power Discharge Characteristics (Watt, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	1288.6	883.6	712.2	458.6	282.6	165.8	123.6	87.5	58.5	49.1	25.9
10.2V	1224.0	839.6	684.2	441.0	271.2	163.4	121.4	86.1	58.0	48.6	25.7
10.5V	1187.1	814.4	667.2	429.6	264.5	162.2	120.4	85.2	57.7	48.6	25.6
10.8V	1150.2	789.3	650.1	418.2	257.8	160.4	119.3	84.4	57.1	48.6	25.5

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.



ZHANGZHOU HUawei POWER SUPPLY TECHNOLOGY CO.,LTD.

Add:Industrial District of Lieyu Town, Yunxiao County, Zhangzhou-363300,Fujian, China
 Tel:+86-596-8991888 E-mail:huawei-battery@vip.163.com Http://www.huawei-battery.com

V20170412