

SPECIFICATION

VOLTAGE
12.8v

CCA (EN)
420A

CHARGING CURRENT STD.
3.5A

CAPACITY (10h)


7.0Ah

ENERGY
89.6Wh

CHARGING CURRENT MAX.
14.0A

DIMENSIONS & WEIGHT

LENGTH	175±2mm
WIDTH	87±2mm
TOTAL HEIGHT	130±2mm
GROSS WEIGHT	1.12kg

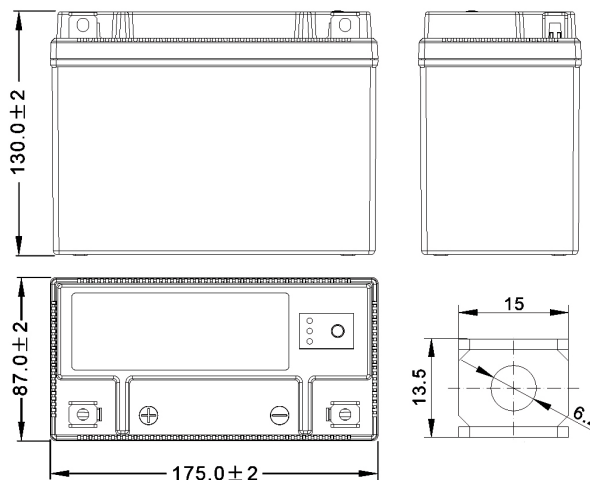

NON-SPILLABLE

LiFePO4

TERMINAL

Front



Side



Top




3D



FEATURES

- EQUIVALENT LEAD ACID BATTERY TYPES: FTX20-BS, FTX20H-BS
- OUTSTANDING SAFETY FEATURES
- ULTRA LIGHT WEIGHT
- MAINTENANCE FREE AND READY TO USE
- FAST CHARGING CAPABILITIES
- HIGH COLD CRANKING PERFORMANCE
- LONG SHELF-LIFE
- VERY LOW SELF-DISCHARGE
- ENVIRONMENTAL FRIENDLY
- COVER MOST OF EXISTING PARC APPLICATION
- EFFICIENT CHARGING INDICATOR

POLARITY



MOUNTING ANGLES

