

LFP24200(25.6V200AH)

Document: Lithium Battery datasheet

Doc. Version: V4.0

Issue Date: 1-1-2024

Overview

NEATA Lithium iron phosphate battery module which designed for storage and power supply system application.

This battery module integrated with intelligent BMS with big advantages on safety, cycle life, energy density, temperature range and environmental protection.

This product specification describes the type, size, structure, electrochemistry performance, service life, and BMS characteristics.

The specification will be updated based on different customer requirement.

Advantages

The battery module consists of LFP cells, wire, BMS and ABS container.

- Packed with high performance LFP single cell, long life, safety and wide temperature range
- High energy density, small size, light weight, no pollution;
- Packing with single cell container, fire retardant wire and copper connecting bar, stable and safe.
- Built-in BMS, with battery voltage, current, temperature and health management.
- LCD(optional) indicate the battery SOC and operating status.
- Support Max 2pcs in series.
- Flexible customization of dimensions
- More than 15 years design life, Stable performance, maintenance-free

Battery Images



Safety



Multipurpose




Simple Maintenance



Fast Charge/Discharge

Customization Functions

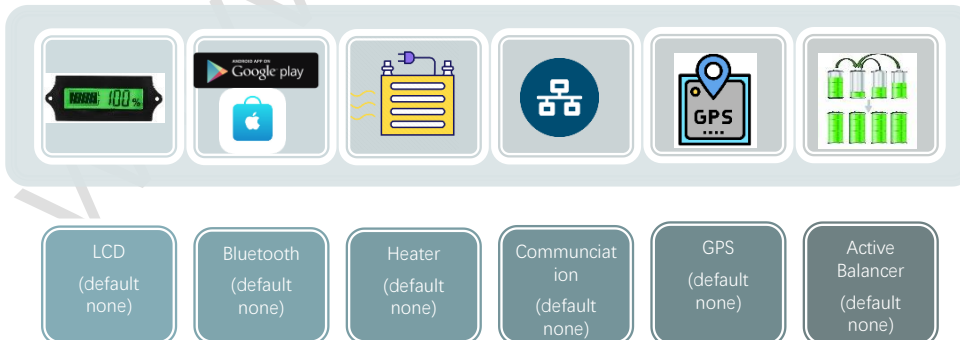

SHENZHEN NEATA POWER TECH CO.,LTD Reminder:

Note 1: Please always refer to the latest edition of our technical datasheet that published on our website to ensure safe and efficient operation.

LFP24200(25.6V200AH)

Document: Lithium Battery datasheet

Doc. Version: V4.0

Issue Date: 1-1-2024

Battery specification

ELECTRICAL SPECIFICATIONS

Cell Type - Chemistry	LiFePo4
Nominal Voltage	25.6V
Amp Hour Capacity	200AH
Dimensions	520*269*220mm
Weight	43.0 ± 0.2kgs
Terminal Type	M8
Case Material	ABS-Sealed
Case IP Rating	IP65
Series connections	Max to 51.2V
Parallel connections	No limited
Storage Temperature	(-10 to 40°C)
Resistance - Milliohms	< 160
Self Discharge per Month	< 2%

CHARGE SPECIFICATIONS

Floating Charge Voltage	≤ 27.6V
Boost Charge Voltage	≤ 28.4V
Recommend Charge Current	≤ 50A
Max Charge current	≤ 200A
Charge current (0 to -10°C)	< 0.1C
Charge current (-20 to -10°C)	< 0.05C
Charge Temperature	(0 to 45°C)

DISCHARGE SPECIFICATIONS

Recommend Discharge current	≤ 200A
Max Cont Discharge current	≤ 220A
Max Discharge Voltage	≥ 20.8V
Discharge Temperature	(-20 to 60°C)

BMS SPECIFICATIONS

Version	Softversion	
Code	J-B04S100	
Primary Charge Current Protection	220 ± 10A	10S±5S
Second Charge Current Protection	NA	
Third Charge Current Protection	NA	
High Voltage Protection	30 ± 0.4V	2S±1S
Reconnect Voltage	28.4V	
Primary Discharging Current Protection	220 ± 10A	10S±3S
Second Discharging Current Protection	250 ± 10A	0.3S±0.2S
Third Discharging Current Protection	NA	
Low Voltage Protection	17.6 ± 0.8V	
Reconnect Voltage	20.8 ± 0.8V	
High Temp Protection	65±3°C	
Reconnect Temp	50°C	
Balancing voltage	26.4 ± 0.4V	
Balancing current	150 ± 10mA	
Shortage current	1320±300A	

Technical specifications according EU regulation (ES) 2023/1542

Rated capacity 200Ah

Capacity fade < 1%

Power 5120 W

Power fade < 1%

Internal resistance < 10m Ω

Internal resistance increase 0,5%

Energy round trip efficiency 99,98%

Energy round trip fade < 0.5%

Battery design time 15 years

Battery design in cycles > 6000cycles@0.2C

Applied discharge rate 1C = 200A

Applied charge rate 1C = 200A

Ratio between nominal battery power (W) and battery energy (Wh) > 98%

Depth of discharge in the cycle-life test 80%DOD

Power capability at 80 % state of charge > 80%

Power capability at 20 % state of charge > 20%

SHENZHEN NEATA POWER TECH CO.,LTD Reminder:

Note 1: Please always refer to the latest edition of our technical datasheet that published on our website to ensure safe and efficient operation.

LFP24200(25.6V200AH)


Document: Lithium Battery datasheet

Doc. Version: V4.0


Issue Date: 1-1-2024

Performance curve


● Discharge characteristics (25°C)

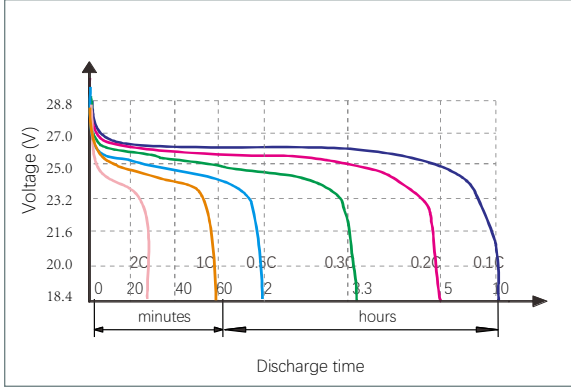


● Temperature effect on discharging (0.5C)

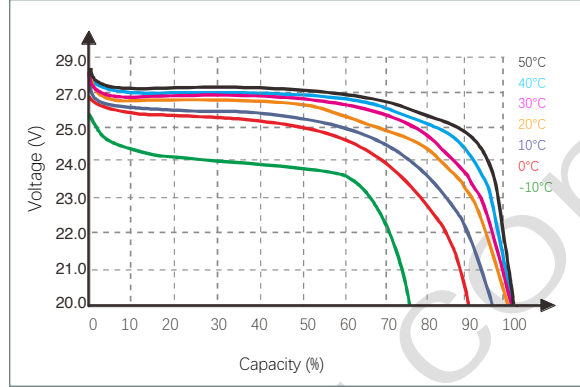


● State of Charge Curve (25°C)

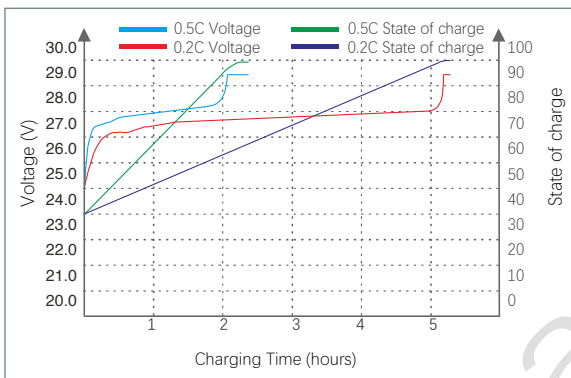


● Charge characteristics (25°C)

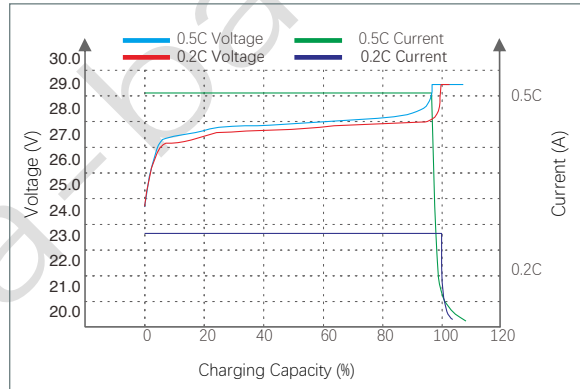

● Cycle Life On D.O.D 0.2C Rate (25°C)

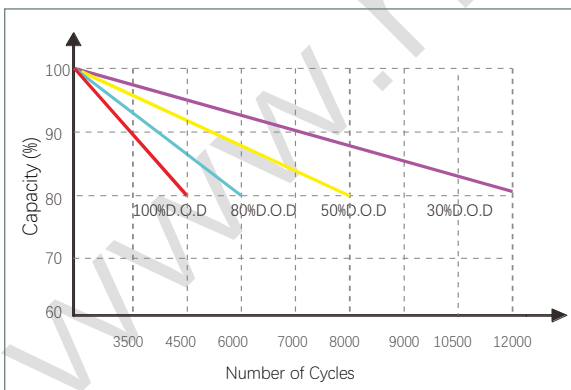

● Self-Discharging Curve

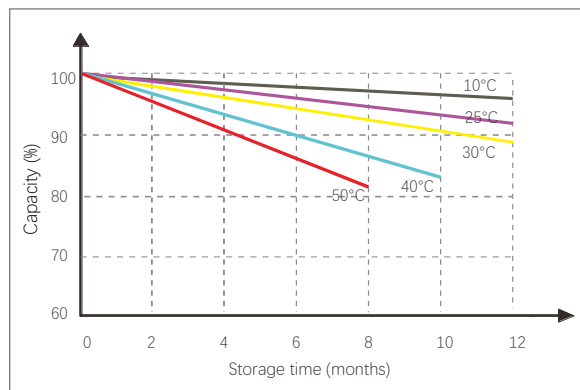

Note 2: The above curves are based on laboratory testing data @ 25°C 40%RH



EU DECLARATION OF CONFORMITY

SHENZHEN NEATA POWER TECH CO.,LTD Reminder:

Note 1: Please always refer to the latest edition of our technical datasheet that published on our website to ensure safe and efficient operation.