



DIGITAL SCREEN INTELLIGENT GEL STORAGE BATTERY GEL ENERGY STORAGE LONG LIFE SERIES

MODEL: OT250-12(GEL)/DS/CD/LL


NO.: 302110066-00016



Container Color
 Grey 3 C

Plane Chart:


Unit:(mm) Terminal type:(T2)

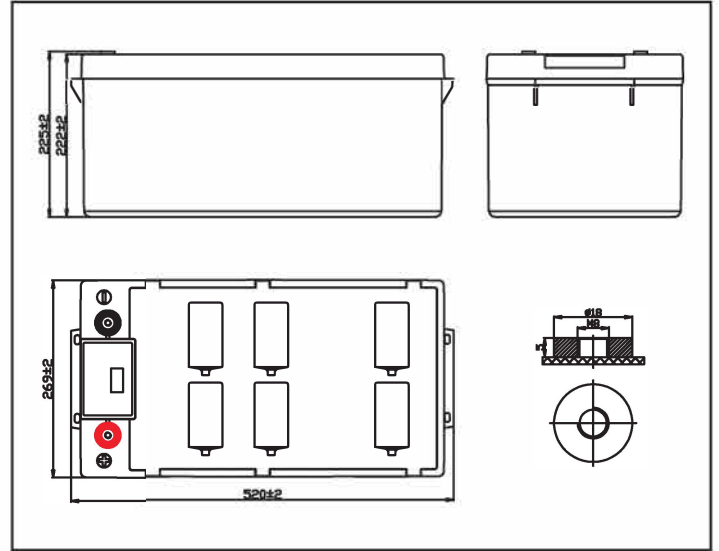


Parameter Chart:

Volts		12V	
Capacity(25°C)	10 hours rate (25A)	250Ah	
Discharge Current Testing (25°C)	1 hours rate (137.5A)	160Ah	
	3 hours rate (62.5A)	195Ah	
Internal Resistance	Full Charged Battery 25°C	3mΩ	
Capacity Affected By Temperature	40°C	104%	
	25°C	100%	
	0°C	83%	
	-15°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%	
	Capacity After 6 Months Storage	82%	
	Capacity After 12 Months Storage	65%	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 75A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	
Weight (Approx)		73.1Kg	

Residual Capacity

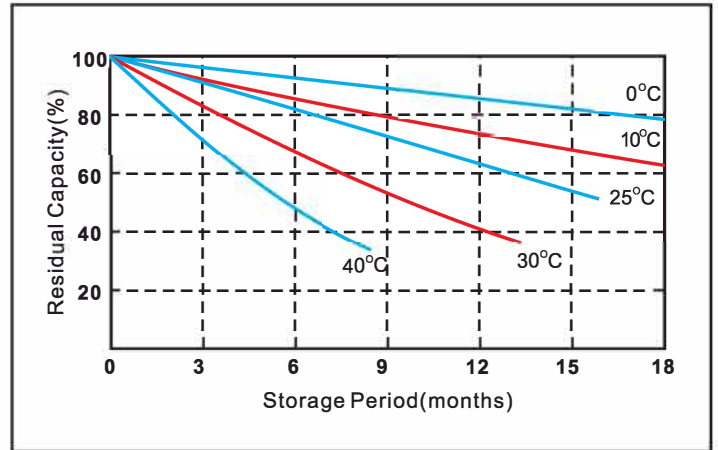


Discharge Current 25°C

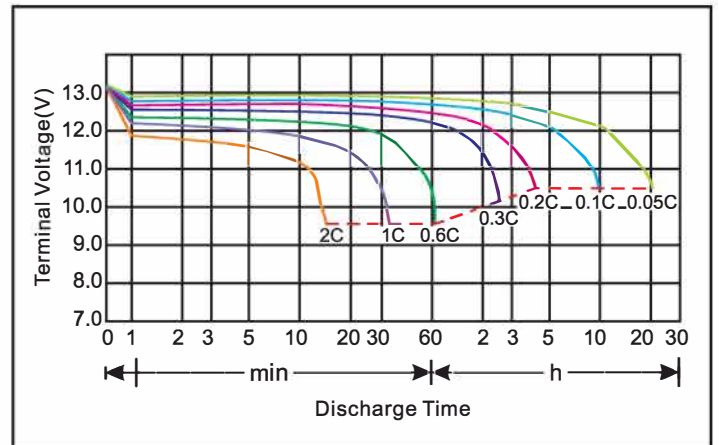


★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

Constant voltage charging characteristics

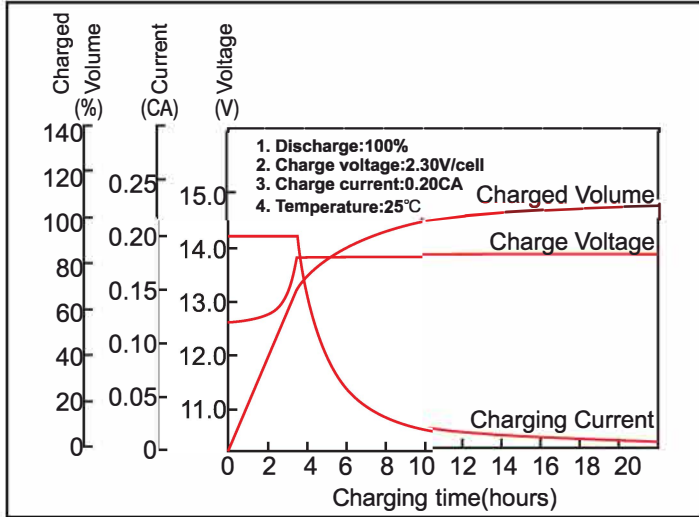

Cycle service life in relation to the depth of discharge

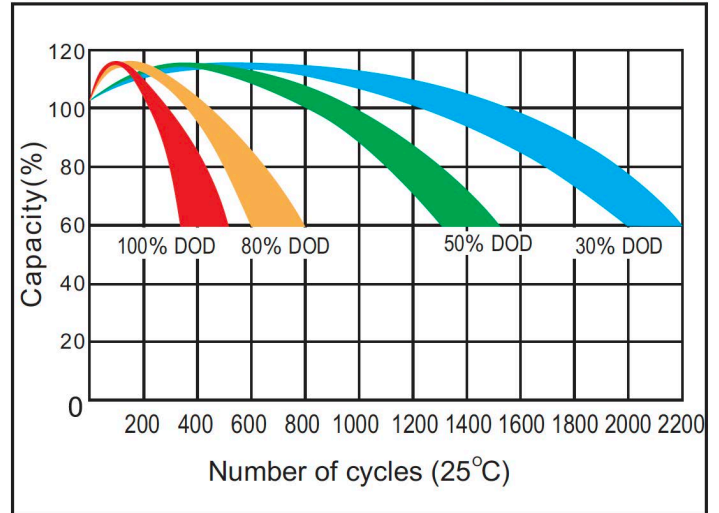

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	30min	45min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	238.5	185.0	152.6	88.7	65.6	51.7	45.3	30.5	25.6	13.1
10.2V	230.8	180.0	148.4	87.3	63.2	51.1	44.7	30.2	25.4	13.0
10.5V	225.9	176.2	145.6	86.5	62.3	50.8	44.3	29.9	25.2	12.9
10.8V	214.4	169.7	141.3	85.6	60.5	49.2	43.8	29.6	25.0	12.8

Constant Power Discharge Characteristics (Watt, 25°C)

F.V/Time	30min	45min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	2480.0	1979.0	1690.2	1026.5	762.3	602.3	529.1	357.2	302.1	156.2
10.2V	2446.0	1947.0	1661.8	1012.5	736.3	596.8	523.0	354.2	300.5	155.2
10.5V	2423.0	1925.0	1647.0	1006.5	727.7	594.9	519.6	351.6	298.6	154.0
10.8V	2388.0	1902.0	1618.0	999.8	709.1	578.1	515.5	349.3	297.0	152.9

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.