


MODEL: OT75-12

NO.: 302010005-00121



Plane Chart:


Unit:(mm) Terminal type:(T1)

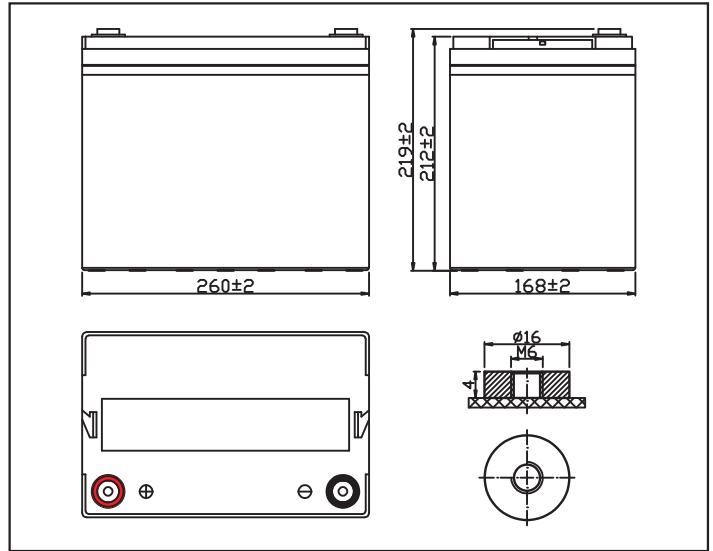


Parameter Chart:

Volts		12V	
Capacity(25°C)	10 hours rate (7.5A)	75Ah	
Discharge Current Testing (25°C)	1 hours rate (41.2A)	43Ah	
	3 hours rate (18.7A)	58Ah	
Internal Resistance	Full Charged Battery 25°C	7mΩ	
Capacity Affected By Temperature	40°C	104%	
	25°C	100%	
	0°C	83%	
	-15°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%	
	Capacity After 6 Months Storage	82%	
	Capacity After 12 Months Storage	65%	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 22.5A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	
Weight (Approx)		22.7Kg	



Residual Capacity

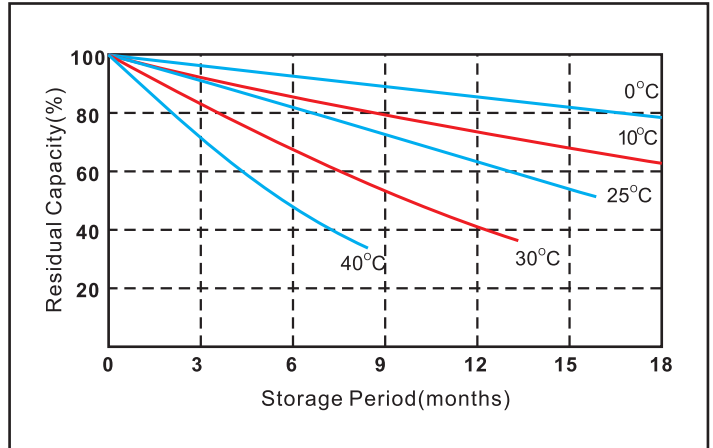

Discharge Current 25°C

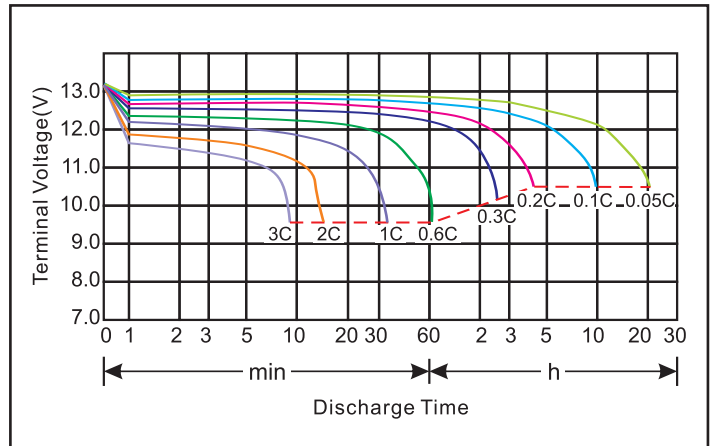

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

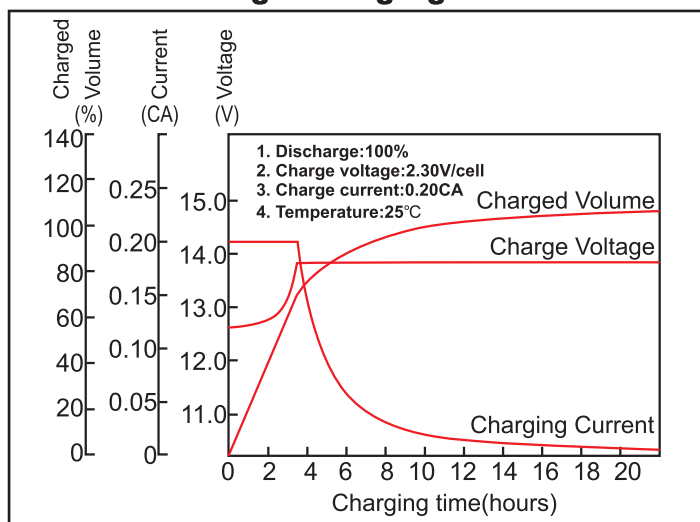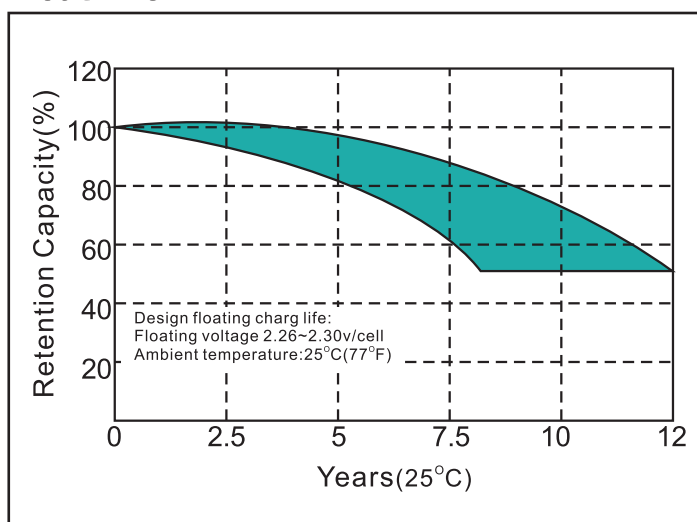MODEL: OT75-12
NO.: 302010005-00121
Constant voltage charging characteristics

Float Life

Constant Current Discharge Characteristics(A,25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	220.0	147.6	124.2	76.0	42.5	26.4	19.3	13.3	9.1	7.7	4.1
10.2V	195.6	139.8	119.2	72.3	41.1	25.8	19.0	13.1	9.0	7.6	4.1
10.5V	175.8	132.5	116.2	70.5	39.5	24.8	18.9	13.0	9.0	7.5	4.0
10.8V	163.0	120.4	113.2	68.5	38.2	23.6	18.4	12.7	8.7	7.5	3.9

Constant Power Discharge Characteristic(Watt,25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	2402.4	1611.8	1356.8	848.2	489.6	310.8	225.6	156.7	108.0	90.9	49.3
10.2V	2136.0	1526.6	1302.1	806.9	462.5	298.6	223.1	154.9	106.9	89.8	48.4
10.5V	1930.3	1454.9	1276.2	791.0	445.6	285.4	222.1	153.8	106.4	89.5	47.5
10.8V	1789.7	1322.0	1243.2	772.7	421.5	275.6	216.9	150.9	103.3	89.1	46.6

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.