


MODEL: 0T9-12

NO.: 302010005-00078





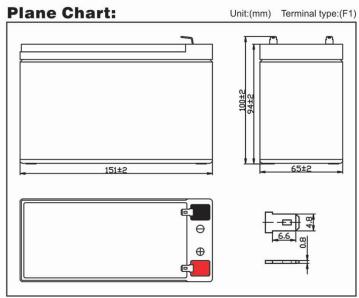





ISO9001 ISO14001 OHSAS18001






Parameter Chart:


i didilictor vilarti									
Volt	s	12V							
Capacity((25°C)	2	9Ah						
Discharge Current Testing (25°C)		20	37min						
		60	8min						
Internal Res	sistance	Full	12.5mΩ						
			40°C		104%				
Capacity Affected By Temperature			100%						
		0°C			83%				
		-15°C			65%				
Residual Capacity (25°C)		Capacity After 3 Months Storage			91%				
		Capacity After 6 Months Storage			82%				
		Capacity After 12 Months Storage			65%				
Charge (Constant	Cycle (25°C)	Initial Char T Voltag						
Voltage)	Float (25°C)		Charge Vo	-13.8V					
Weight (Appro			x)	Kg					

[★]The above are average and data obtained from the firsr 3 charge/discharge cycles. These are not minimum values.

Residual Capacity

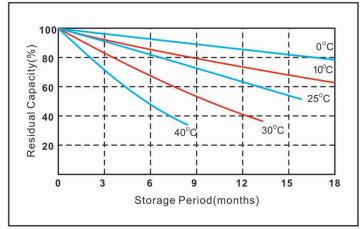

Discharge Current 25℃

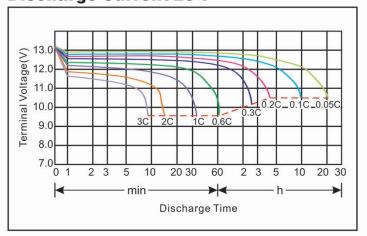





MODEL: OT9-12

NO.: 302010005-00078

Constant voltage charging characteristics

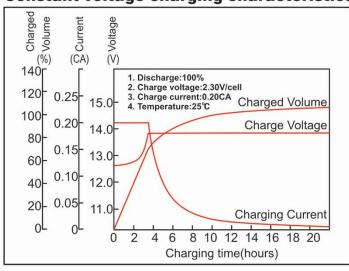

Float Life

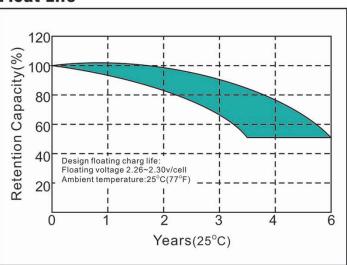

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	39.08	25.75	19.04	10.62	5.81	3.21	2.18	1.51	1.00	0.81	0.45
10.2V	37.17	24.25	18.14	10.22	5.58	3.16	2.15	1.49	0.99	0.81	0.44
10.5V	36.17	23.85	17.84	9.92	5.47	3.13	2.13	1.48	0.98	0.80	0.43
10.8V	34.84	23.05	17.33	9.72	5.30	3.10	2.11	1.46	0.98	0.80	0.43

Constant Current Discharge Characteristics (Watt, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	435.87	290.58	217.43	121.24	67.33	37.47	25.95	18.04	12.12	9.77	5.45
10.2V	414.83	273.55	206.41	117.32	64.63	36.97	25.55	17.84	11.92	9.74	5.43
10.5V	402.80	268.54	203.41	113.23	63.33	36.57	25.35	17.64	11.72	9.67	5.41
10.8V	388.78	259.52	197.39	111.22	61.42	36.17	25.15	17.43	11.62	9.62	5.39

Capacity Factors With Different Temperature

Battery	Туре	-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the firsr 3 charge/discharge cycles. These are not minimum values.



ZHANGZHOU HUAWEI POWER SUPPLY TECHNOLOGY CO.,LTD.