



Qoltec Mobile charger for EV 2-in-1 type2 | 7kW | 230V | CEE 5 PIN

Product code: 52471

The Qoltec mobile charger powered by standard 5-pin power socket powered at 230V with charge current control will provide you with convenient and safe charging of your electric car battery.

- 5-pin power plug
- LCD display
- Adjustable charging current
- Delayed start function
- Easy mounting to the wall
- 5m cable

THE BEST SOLUTION FOR CHARGING ELECTRIC VEHICLES




Don't let the low charge of your battery prevent you from using your electric vehicle. With the Qoltec mobile charger you can charge your car battery in just a few minutes. The portable charger is perfect for longer holiday trips, for example, thanks to its compact design, **it takes up little space and can easily be transported directly in the boot** or in the included bag. The charger is powered from a standard 5-pin 16A power socket, while the car is connected using a Type 2 car charging connector.

EUROPEAN CONNECTOR STANDARD TYPE2



The charger has a **Type 2 connector**, which is now an **official European Union standard**, and will charge electric cars equipped with a suitable charging socket. The Type 2 connector is **7 contacts, of which 3 contacts or 5 are for charging and 2 for communication between the station and the car**. Compatible with most electric cars sold in Europe. The Qoltec brand charger supports four current modes of **16A, 20A, 24A and 32A**. It is worth mentioning that the Type 2 connector is **designed for electric vehicles with a charging power of more than 3kW**.

MULTIFUNCTIONAL LCD DISPLAY

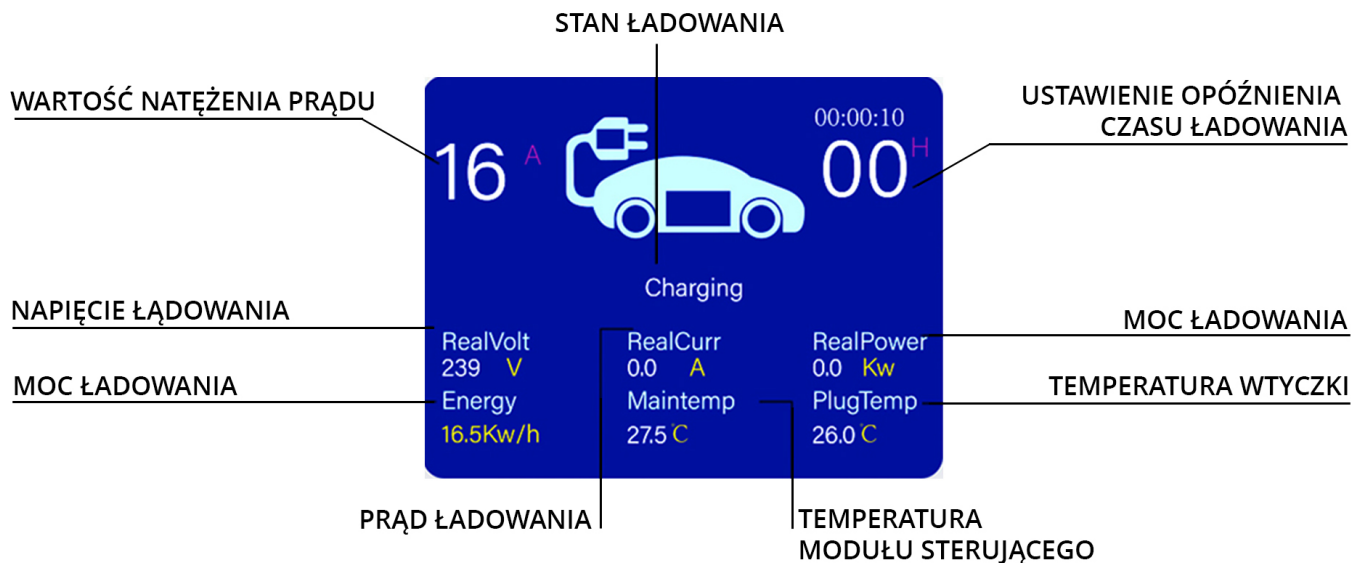

The product is equipped with a multifunctional, 2.4" LCD display and LEDs indicating charging status. On the display we can :

- set the current value using the a button : 16A, 20A, 24A, 32A;
- check the exact charging time,
- set the charging time delay simply by using the button with the clock icon,
- monitor the operating temperature of the charger in real time thanks to the built-in plug temperature sensor, the charger will immediately interrupt operation if the safe value is exceeded and will automatically resume operation when the temperature returns to a normal level,
- monitor the progress of the charging process,

Automatic error repair

In addition, the charger has an intelligent chip that automatically corrects errors during charging, reacting accordingly if any of the parameters exceed the norm, ensuring stable charger operation.

DELAYED CHARGING FUNCTION



You can set a delayed charging start time of 1, 2, 5 or even 8 hours and save on energy costs by, for example, using the night-time tariff, this is more economical as we are not overcharging the system. Simply connect the charger to the power supply and then press the delay button a certain number of times before connecting the car. By pressing the button with the clock icon, charging is delayed by 1 hour after each click.

CHARGE AT HOME OR ON THE ROAD



If you want to mount the EV charger on a wall you should choose a suitable location for this, preferably close to the car and the power source. You will also need to install a residual current circuit breaker – a type B RCD is the best choice as a means of full complementary protection. Ensure that it is in a **location that is protected from moisture, free from any mechanical damage and not exposed to direct sunlight**. Be absolutely sure that this is the case. A high level of convenience will be provided by the 5 m charging cable with ergonomic plug.

WATER-RESISTANT POLYCARBONATE HOUSING



Our chargers are constructed from durable, UV-resistant, non-flammable polycarbonate. In addition, the charger exhibits high water resistance and is dustproof. The casing has special holes for external mounting.

BE ECOLOGICAL AND POWER YOUR CAR WITH CLEAN ENERGY




Use your own renewable clean energy from photovoltaics to charge your car – a way to reduce your car's running costs and your carbon footprint . You can recharge your car at any time and even several times faster. The number of panels you will need to charge your car will depend on the characteristics of your battery, the model of your vehicle and the distances you travel.

You can charge it in two ways :

- while the photovoltaic panels are producing energy - this is the most cost-effective solution
- using the excess energy produced by the photovoltaic panels, which is returned to energy storage or the grid and can be used at a later date.

THE SAFETY OF YOU AND YOUR LOVED ONES IS IMPORTANT TO US

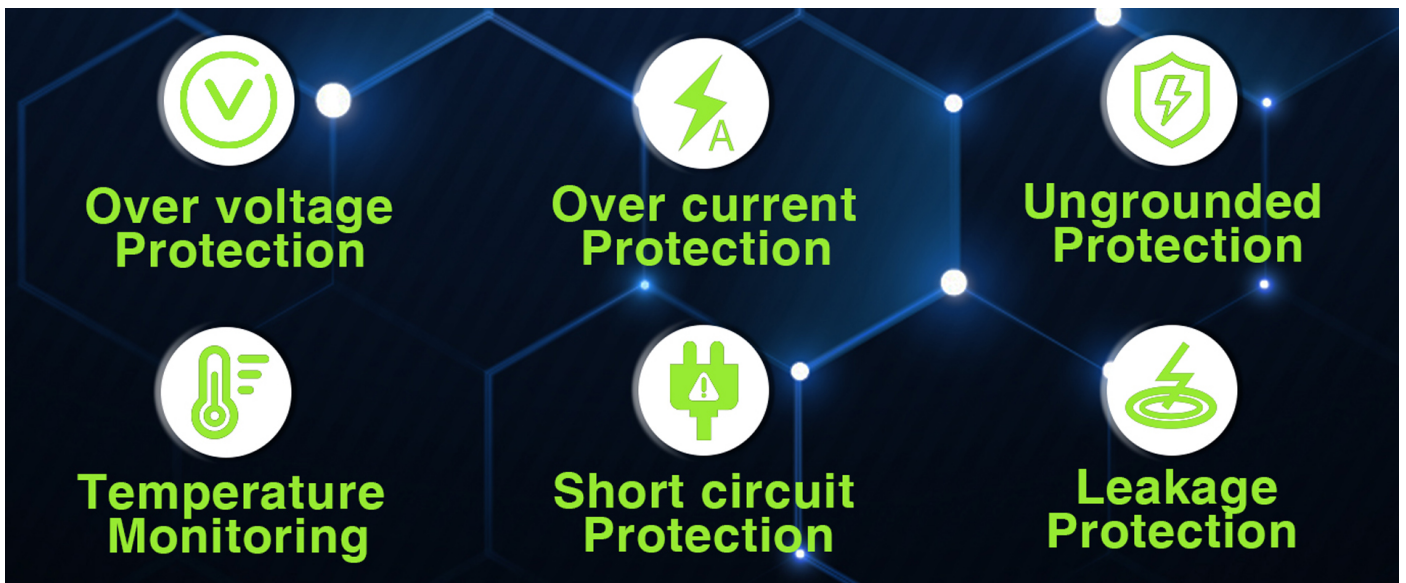

When designing the chargers, we put safety first. You can now charge your car safely and quickly. The product has advanced safety features and has LEDs that change colour depending on the current status.

CONFIDENCE CONFIRMED BY A WARRANTY

Do you care about the high quality of the product you are buying? Our solutions will meet your expectations. The chargers we offer come with a purchase.

24-month guarantee from the date of

TECHNICAL DATA

Producer	Qoltec
Type	2
Input voltage	230VAC
Output voltage	230VAC
Operating current	max 32A
Frequency	50 Hz
Insulation resistance	>10M
Type of charging interface	IEC 62196-2
Display	LED 2,4"
Plug type	5-PIN CEE
Safety	Over voltage protection Over current protection Ungrounded protection Temperature monitoring Short circuit protection Leakage protection
Cable length	5m
Attention	Only use the charger if the mains supply is fitted with a residual current circuit breaker Do not attempt to repair the appliance yourself Please do not use the device with an additional power supply
Working temperature	-30°C ~ +50°C
IP Rating	IP65
Colour	Black, green
Dimensions (D/L x W x H)	215 x 98 x 58 mm (charger) 235 x 70 x 62 mm (plug) 120 x 385 x 345 (bag)
Package contents	1 x EV charger 1 x Wall mounting bracket for charger 1 x Mounting screws 1 x Charger storage bag 1 x User manual 1 x Warranty card
Package	Box
Package depth / length [mm]	355
Package width [mm]	400
Package height [mm]	140
Net weight [kg]	3.400
Gross weight [kg]	3.800
Certificate	CE
Warranty	24 month
EAN code	5901878524719