




## Qoltec Hybrid Solar Inverter Off-Grid 3.5kVA | 3.5kW | 100A | MPPT | LCD | BMS | Sinus

Product code: 53870

The off-grid hybrid inverter converts the energy created by the PV modules into energy to power electrical appliances. Equipped with a multifunctional LCD display, it records operating data allowing continuous monitoring and management of the entire system. It operates in off-grid mode. Allows power to be supplied directly from solar panels or other energy sources, without the need for a backup battery. Has a built-in MPPT 100A charge controller, BMS and 80A AC charger. Compatible with LiFePO<sub>4</sub>, AGM, GEL and DEEP Cycle batteries.

### BE ENERGY INDEPENDENT

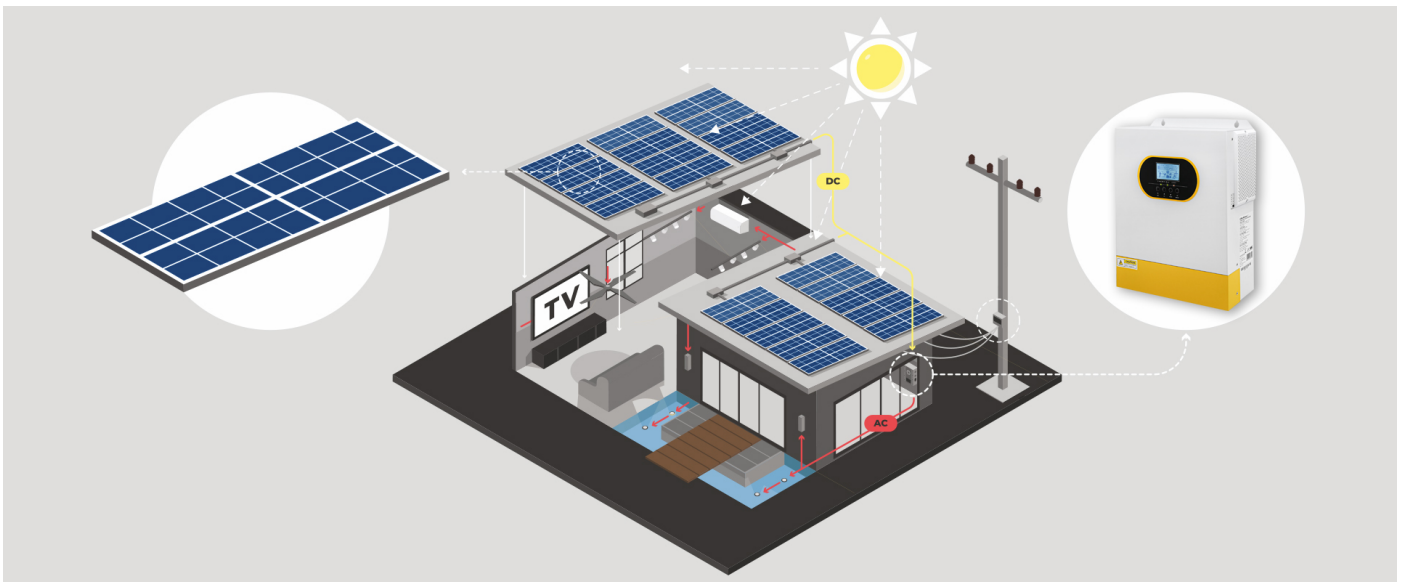

### How does the hybrid inverter work in off-grid mode ?

The performance of a photovoltaic system depends on the selection of the right inverter, or solar inverter. The inverter performs a key function in this system, **converting the DC current generated by the photovoltaic panels into AC current used by household appliances.** The off-grid hybrid inverter **connects the photovoltaic system, energy storage and the grid.**

It uses excess solar energy to power consumers and charge the battery. When energy production is greater than current demand, **the excess current can be transferred to charge LiFePO<sub>4</sub>, AGM, GEL or energy storage batteries, allowing energy to be stored for later use, such as at night or on cloudy days .** The hybrid inverter can automatically switch to off-grid mode, supplying energy from the batteries.

## WHY SHOULD YOU CHOOSE A HYBRID INVERTER ?



### Advanced energy management functions: BMS, MPPT charge controller

- Inverter with pure sine wave inverter type, - automatic restart during AC power restoration, - readable multifunctional touchscreen LCD display,
- 100A MPPT charge controller,
- option of mains or generator power supply,
- ability to change AC/Solar charger priority settings via LCD display,
- intelligent charger design for optimum battery performance
- configurable input voltage range for home appliances and PCs via settings on the LCD display panel,
- configurable battery charging current depending on appliances and PCs via settings on the LCD display,
- cold start function,
- reserved communication port for BMS (RS485, RS232).

## MAXIMIZE THE POSSIBILITIES WITH MPPT TECHNOLOGY



### Increase in electricity production with a significant decrease in operating costs

The battery charging inverter uses a state-of-the-art 100A MPPT charge controller to maximize the power drawn from the photovoltaic panels, using advanced maximum power point tracking technology. Having this feature significantly affects the efficiency of the photovoltaic installation—they can maintain high power even in low sunlight conditions. In addition, the controller controls the battery operation and charging process and protects the battery from damage.

## BATTERY MANAGEMENT SYSTEM (BMS)



# Battery Management System

## Manages battery parameters for optimal charging and discharging

The built-in BMS battery management system is crucial for the long-term life of the battery in an off-grid system. The BMS monitors and manages battery parameters, ensuring optimal charging, discharging and protecting against overcharging or over-discharge. This allows users to enjoy a reliable source of energy for many years.

## MULTIFUNCTIONAL TOUCH-SCREEN LCD DISPLAY



## Continuous monitoring of battery performance

The product is equipped with a multifunctional, easy-to-use LCD display with control panel. Facilitates monitoring of the entire photovoltaic installation. Allows you to configure the input voltage range for home appliances and personal computers or change the priority settings of the AC/Solar charger. In addition, the display records data and informs about failures, reacting accordingly if any of the parameters exceed the norm. If a fault occurs, the inverter shuts down.

## CONFIDENCE CONFIRMED BY A WARRANTY

## Product with 24 months guarantee

Our company is committed to providing technical support and customer service, making our guarantee a comprehensive commitment to customer satisfaction for two years from the date of purchase. The accompanying protocol is an integral part of the guarantee and is necessary to make a claim for faulty goods within 24 months of purchase.

## TECHNICAL DATA

Producer	Qoltec
Type	Off-Grid
Phase	1
Rated Power	3500VA/3500W
Input parameters	
Nominal input voltage	230VAC
Maximum AC input voltage	300VAC
Working frequency	50/60 HZ (auto detection)
Output parameters	
Efficiency	95%
Transfer time	10 ms (PC) 20 ms (home appliances)
Waveform	Pure sine wave
Features of the battery	
Type of charging	MPPT
Battery voltage	24VDC
Variable charging voltage	27VDC
Battery overcharge protection	Yes
Maximum battery charging current from PV	100A
Work without battery	Yes
Solar charger	
Maximum PV array open circuit power	4000W
MPPT STARTING VOLTAGE	60VDC
Maximum solar charge current	100A
MPPT operating voltage range	60 ~ 500VDC
Maximum PV array open circuit voltage	500VDC
Other parameters	
Screen	LCD
Interface	RS-232, RS485
Cooling system	2 x fan
Noise level	45 dB
Protection	Anti-short-circuit Against overheating Against overload Against overload
Colour	White, yellow
Additional information	Support LiFePO4 AGM, GEL, Deep cycle batteries Support BMS
EAN code	5901878538709